


# BOD Incubator

## Growth of micro-organisms

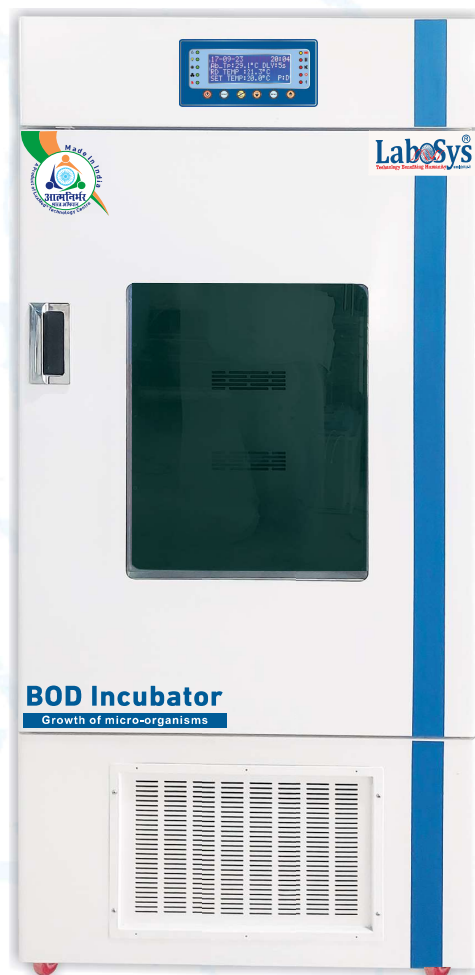

## Biochemistry Incubator

### Features:

- LCD Display / LED Display.
- Double door design.
- Polished stainless steel chamber.
- Round angle structure , easy to clean.
- Universal castors for easy movement.
- CFC-free environmental friendly refrigerant.
- Microprocessor PID temperature control: accurate and reliable.
- BOD socket integrated inside for additional small equipment.

### Safety function:

- Temperature protection threshold value can be set.
- Auto-off protection and alarm for abnormal situation.
- Parameters can be saved automatically when power off or system error.

### Models:

Model	LMX-B100	LMX-B150	LMX-B200	LMX-B250
Capacity	100L	150L	200L	250L
Temp. Range	0~60 °C			
Temp. Fluctuation	±0.5°C			
Temp. Uniformity	±1°C at 37°C			
Shelves	2pcs/adjustable			
Time Range	0~99h			
Refrigerant	R134a (CFC free, eco-friendly)			
Working Type	Continuous			
Standard Accessories	BOD socket, built-in printer, 2 test ports, lock			
Optional Accessories	USB port			
Consumption	1450W			
Power Supply	AC110/220V±10%, 50/60Hz			
Internal Size (mm)	500*350*580	550*401*690	600*450*750	660*450*850
External Size (mm)	644*647*1170	690*692*1270	742*743*1340	802*743*1440
Package Size (mm)	734*767*1400	780*782*1500	832*833*1570	892*833*1670
Gross Weight (kg)	102	110	118	126

M: +91 8130383561, 9350831213 | E:cto@labosys.in

SCAN & SEND MESSAGE :



SCAN & FOLLOW US ON :

